

Comprehensive Cable Certification Know-How for **Automation & Drives** Products

TESTING CAPABILITIES >

ELECTRICAL TESTING

- Network Analyzer measurements up to 50 GHz
- S-Parameter, Skew, De-Embedding
- Voltage measurements up to 60 kV (DC)
- All relevant Fieldbus or Ethernet standards (CAT 5 up to CAT 8)
- Transfer impedance, screen and coupling attenuation, etc.

MECHANICAL TESTING

- Drag chain tests
- Torsional tests
- Alternate and S-bending test
- Custom movements
- Crush test
- Tensile and Elongation tests

SITE CERTIFICATION >

DIN ISO 9001 | DIN ISO 14001 | DIN ISO 50001 | DIN ISO 9100

PARTNER ASSOCIATIONS >



BIZLINK - PART OF SEVERAL APPROVAL AUTHORITIES >



Where Possibilities Connect™

High-Performance Cables Customized for Your Application **Automation & Drives**



Find out more
automation-drives.
bizlinktech.com



Contact us
factory-automation-
machinery.bizlinktech.
com/contact/



BizLink career
en.karriere-bizlink.de

BizLink Factory Automation & Machinery

BizLink Group channel

Factory Automation & Machinery

BizLink Special Cables Germany GmbH
Eschstrasse 1 · 26169 Friesoythe · Germany


Reliable, efficient, and durable –
optimized cable solutions tailored to
your specific requirements.

Factory Automation & Machinery

BizLink

© Copyright 04/2026 – All contents of this catalog/brochure, in particular texts, photographs and graphics, are protected by copyright. The trademark BizLink and other trademarks stated herein are trademarks of BizLink International Corp., its subsidiaries, or other recognizable companies. Technical changes reserved, a statement of use for your application is not made herein. All deliveries and services are subject exclusively to our General Terms and Conditions for Deliveries and Services to Entrepreneurs.

Tailored Engineering. Superior Manufacturing. Tailored to Your Needs.

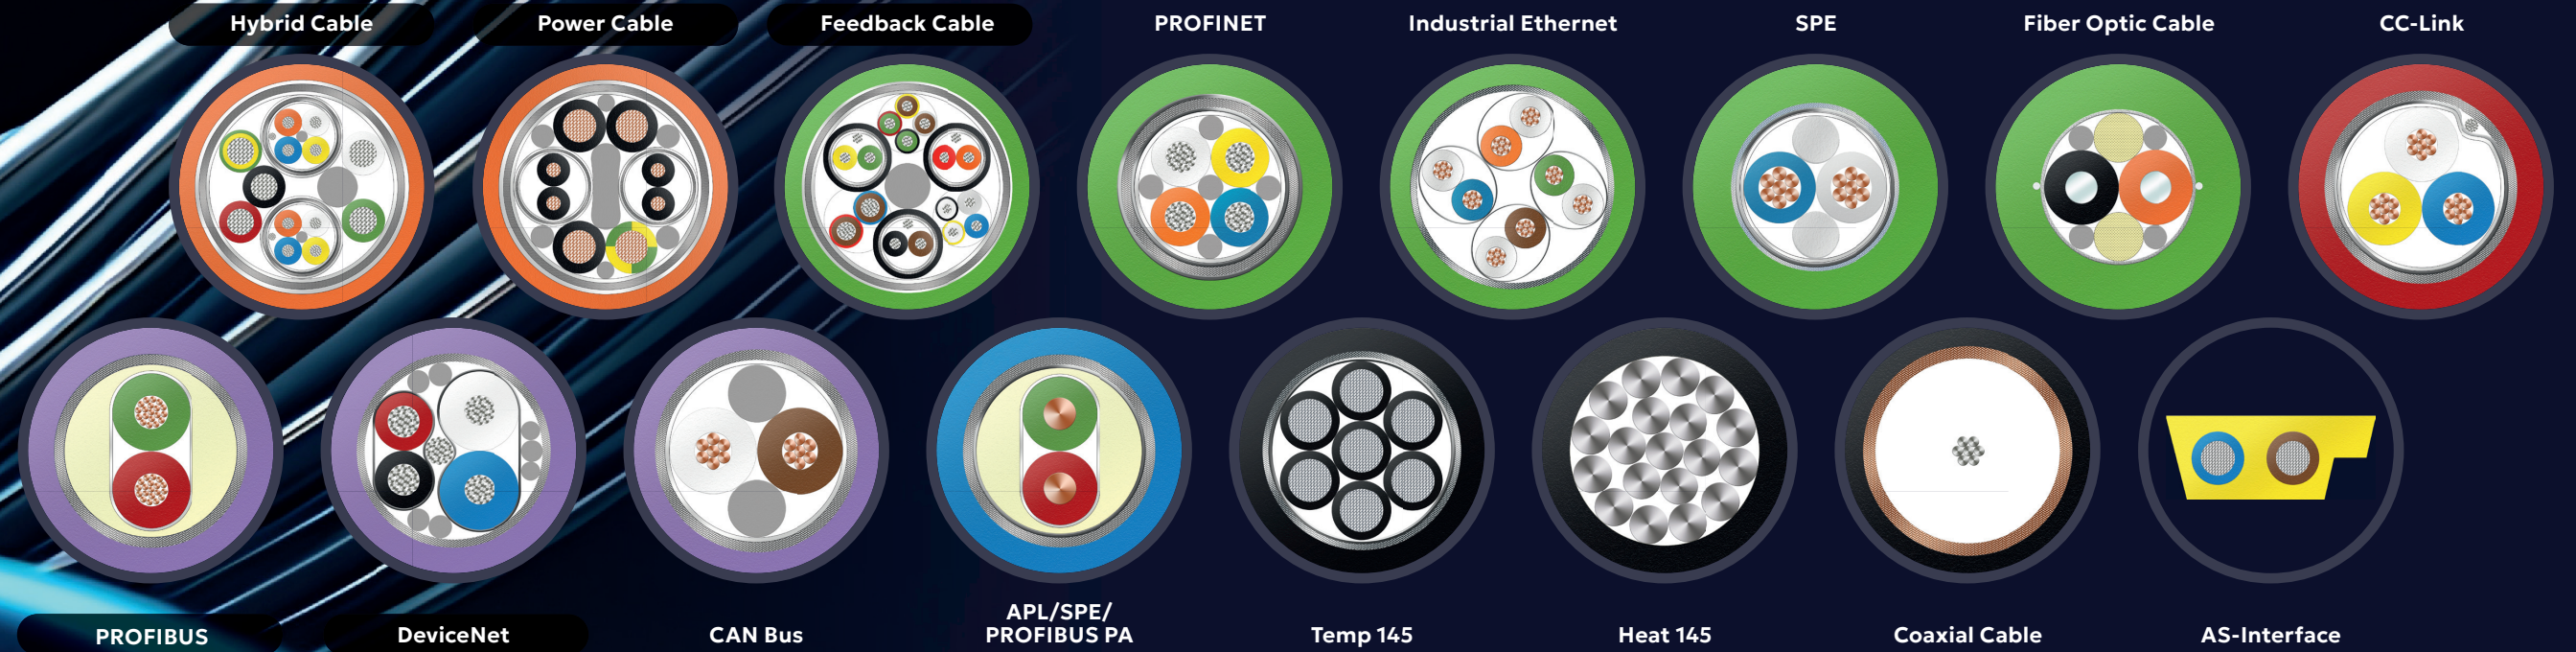

At BizLink, we don't just provide standard products – we deliver customized precision. We combine decades of expertise in material science with state-of-the-art manufacturing technology to turn your vision into reality.



OUR MANUFACTURING CAPABILITIES – YOUR COMPETITIVE EDGE

- **Custom Design** > From initial sketch to prototype – we develop cables tailored exactly to your installation space and dynamic requirements.
- **Material Expertise** > In-house compounding for extreme resistance against e.g. chemicals, high temperatures (up to 260 °C), or mechanical stress.
- **High-End Extrusion** > Unique processes like Skin-Foam-Skin for optimized signal transmission with minimum diameters.
- **Maximum Complexity** > We can strand up to 42 elements in a single process – including air tubes, Kevlar strength members, or shielded pairs.
- **Proven Quality** > Seamless in-line monitoring and rigorous stress testing in our in-house test center guarantee absolute reliability.

CABLES – DESIGNED TO MEET YOUR REQUIREMENTS


- Drag chain compatible
- Highly flexible
- Flame retardant
- Halogen free
- Oil resistant
- Fire resistant (PH 180)
- Mud resistant
- EMC compatible
- Sunlight resistant
- With rodent protection
- For direct burial
- Crush resistant
- UL approvals
- Marine approvals
- CPR approved

SPECIAL DESIGNS FOR >

- Automation Technology
- Packaging
- Chemicals
- Drives Applications
- Shipbuilding
- Forestry & Timber
- Robotics
- Offshore
- Oil & Gas
- Food & Beverage
- Aerospace
- Agriculture
- Machine Tools & CNC Technology
- Logistics
- Energy & Utilities

INSULATION OPTIONS

- | | |
|-----------------|-------------------|
| • PE 105 °C | • PA 105 °C |
| • Foam PE 80 °C | • MPPE 120 °C |
| • PP 120 °C | • ETFE 150 °C |
| • Foam PP 90 °C | • FEP 200 °C |
| • PVC 90 °C | • Foam FEP 200 °C |
| • FRNC 120 °C | • PFA 260 °C |
| • TPE 120 °C | |

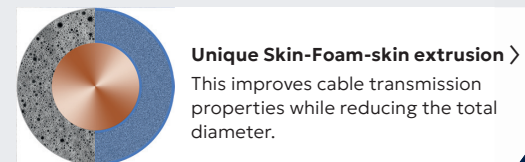

Unique Skin-Foam-skin extrusion >
This improves cable transmission properties while reducing the total diameter.

TWISTING OPTIONS

- Twisted pairs
- Twisting elements
- Layer twisting
- 42 elements in one step
- Diameter: up to 30 mm
- Air blocking injection
- Water blocking yarn
- Machines for HF (50GHz) App.
- Different fillers, tubes, fibers, strength members

TAPES & BINDERS OPTIONS

- Polyester
- Polyester/Aluminium
- Polyester/Copper
- Non woven
- PTFE
- ePTFE
- Water blocking



ISOLATION / JACKET OPTIONS

- | | |
|---------------|--------------------|
| • PE 105 °C | • ETFE 150 °C |
| • PP 120 °C | • FEP 200 °C |
| • PVC 90 °C | • PFA 260 °C |
| • TPU 90 °C | • Silicone 180 °C |
| • FRNC 180 °C | • Polyimide 220 °C |
| • TPE 90 °C | • PEEK 260 °C |
| • PA 105 °C | |
| • MPPE 120 °C | |

CONDUCTOR OPTIONS

- Bare copper
- Tinned plated copper
- Silver plated copper
- Steel/Alu copper
- High strength alloys
- Fiber (different types)

Dimensions >
Cores AWG40 – AWG10 (0.02 – 7 mm²)
Specialties AWG 40 – AWG 2 (0.005 – 40 mm²)
Outer diam. up to 40 mm
No. of cores up to 95

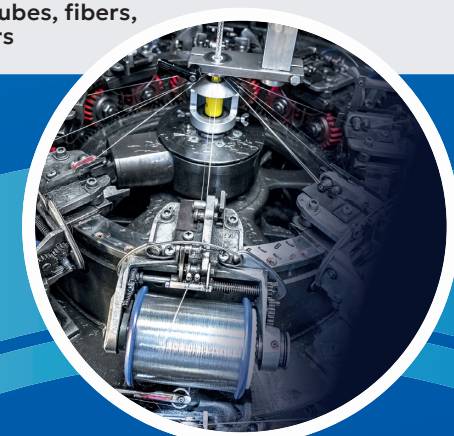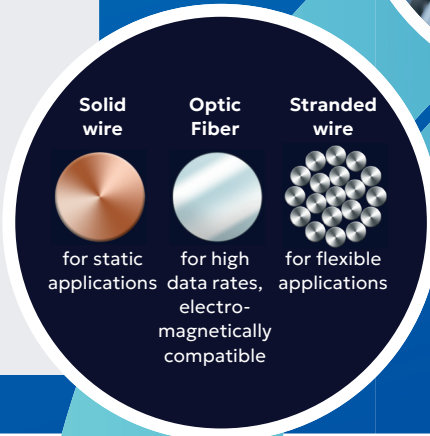

CABLE SHIELDING OPTIONS

- Bare copper
- Corrugated copper
- Tin plated copper
- Silver plated copper
- Silver plated alloy
- Steel
- Polyester/Aluminium
- Polyester/Copper

Foil-Add-on >
Braided/Spiral (AWG44– AWG30)